

**Objective**

The full FARETTI MAGNETE series comes from one basic idea: the freedom to position the lights as you want in the track and move them anytime you like to. This idea has become reality thanks to the magnet at the top of all the products of this series. Our new system is really innovative and the installation is something you can manage by yourself for how easy is it. FARETTI MAGNETE is a linear, combinable system for track. Resulting recessed in the track itself, is a discreet and elegant solution even between a projector and the other.

**Obiettivo**

L'intera serie FARETTI MAGNETE giunge da un'idea di base: la libertà di posizionare le luci come si vuole nella guida e spostarle, riposizionarle ogni qualvolta sia desiderato. Quest'idea è divenuta realtà grazie al magnete posizionato in cima a tutti i prodotti della serie. Il nostro nuovo sistema è veramente innovativo e la sua installazione è qualcosa che si può gestire da sé per quanto è facile. FARETTI MAGNETE è un lineare, combinabile sistema per guide/binari. Risultando incassato nel guida stessa, è una discreta ed elegante soluzione anche tra un proiettore ed un altro.

**Description**

**Housing** - Die cast aluminium with option of black & white finish.

**Diffuser** - Tempered glass or PMMA polycarbonate

**Reflector** - Optical PMMA lens.


**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1




| CODE    | WATTAGE | LUMEN | SIZE mm             |
|---------|---------|-------|---------------------|
| 9105308 | 8W      | 920lm | 173.5 X 34 X 58.6 H |



**Mounting Accessories**



|                     |                           |               |
|---------------------|---------------------------|---------------|
|                     | PWM / 2.4GWifi Controller |               |
| 55°C                | Glowing Wire Test - 850°  |               |
| -25°C               |                           |               |
| IP 44               | UGR <19                   | SDCM 2.0/3.0  |
|                     | COMPLIANCE LM-78 TM-21    |               |
|                     |                           |               |
| PASEL ACCREDITATION | SMD                       | CRI >90       |
|                     | SELV                      | series wiring |
|                     |                           |               |
| <b>A++</b>          |                           | DC 48V        |

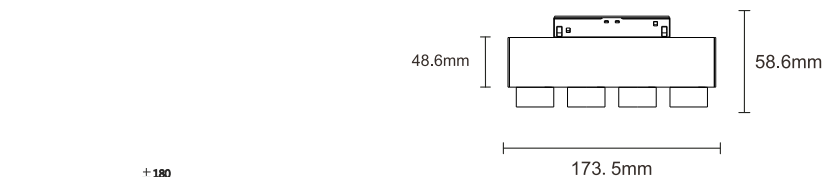

3000K  
4000K  
5000K

LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.